


CONVENTIONAL TRANSFORMERS

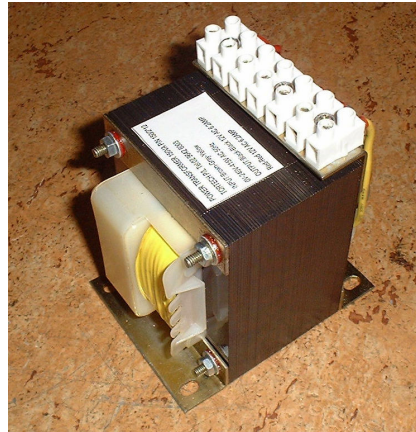

Part Number	VA Rating	L (mm)	W (mm)	H (mm)	ML (mm)	MW (mm)	Weight kg
50/2*12	50	77	55	91	62	44	1.0
75/2*12	75	81	65	99	67	51	1.6
100/2*12	100	83	72	109	70	57	1.9
150/2*12	150	93	72	109	80	57	2.8
200/2*12	200	100	81	121	85	64	3.3
300/2*12	300	111	96	130	95	86	5.2

- Quality open style conventional chassis mount transformers
- Input: Dual 415V or 240V at 50/60Hz
- Output: Twin 12V or 24V (may be connected in series, parallel or used independently)
- Designed to Australian standard AS/NZS 61558
- Terminal blocks on both input and output
- Standard baseplate mounting
- 100% electrical & flash tested
- No fuse or thermal cutout included.
- Meets requirements of class B insulation system (130°C)
- Tortech's design format facilitates a wide range of output voltages, configurations and termination possibilities. Please discuss your specific requirements with our sales staff.
- ***Details are subject to change without written notification***